

**Part No.** 109322150

**Series** Multi-X Duo 10

3D

PDF

Inquiry List

---

### Category title

GII - Duo 10 (WEO Connection)

---

### Class title

MALE PLATE

---

**Size DASH**

-06

---

**Size Inch**

3/8

---

**Size ISO**

10

---

**Number of connections**

2

---

**Connection**

WEO 3/8"

---

**Measure L (mm)**

120 mm

---

**H3 (mm)**

5 mm

---

**Nominal flow diameter (mm)**

10.0 mm

---

**Max working pressure (bar)**

350 bar

---

**Min temperature (C)**

-30 °C

---

**Max temperature (C)**

100 °C

---

**Material**

Zinc plated steel, anodized aluminum, brass

---

**Material female plate**

Zinc plated steel, anodized aluminum, brass

---

**Material male plate**

Zinc plated steel, anodized aluminum, brass

---

**Connectability**

1: Up to 350 bar residual pressure on the male side and free to drain on the female side. 2: Up to 250 bar residual pressure on the female side and free to drain on the male side. 3: Up to 250 bar residual pressure on the male side and 10 bar return pressure on the female side.

---

## Disconnection under pressure


To be avoided. Residual pressure can result in recoil effect during disconnection. Always grip the lever firmly.

---

# Multi-X Duo 10

CEJN Multi-X Duo 10 is a multi-connection plate with 2 ports, size DN10. All plates are designed with spill free Flat-Face couplings according to ISO 16028. Nipples with integrated pressure eliminators ensure smooth connections even with high residual pressure. Working pressure of up to 35 MPa can be used on both ports simultaneously. For optimal flexibility both the male and female plate can be used as the fixed part and each plate can also be outfitted with electric connectors.



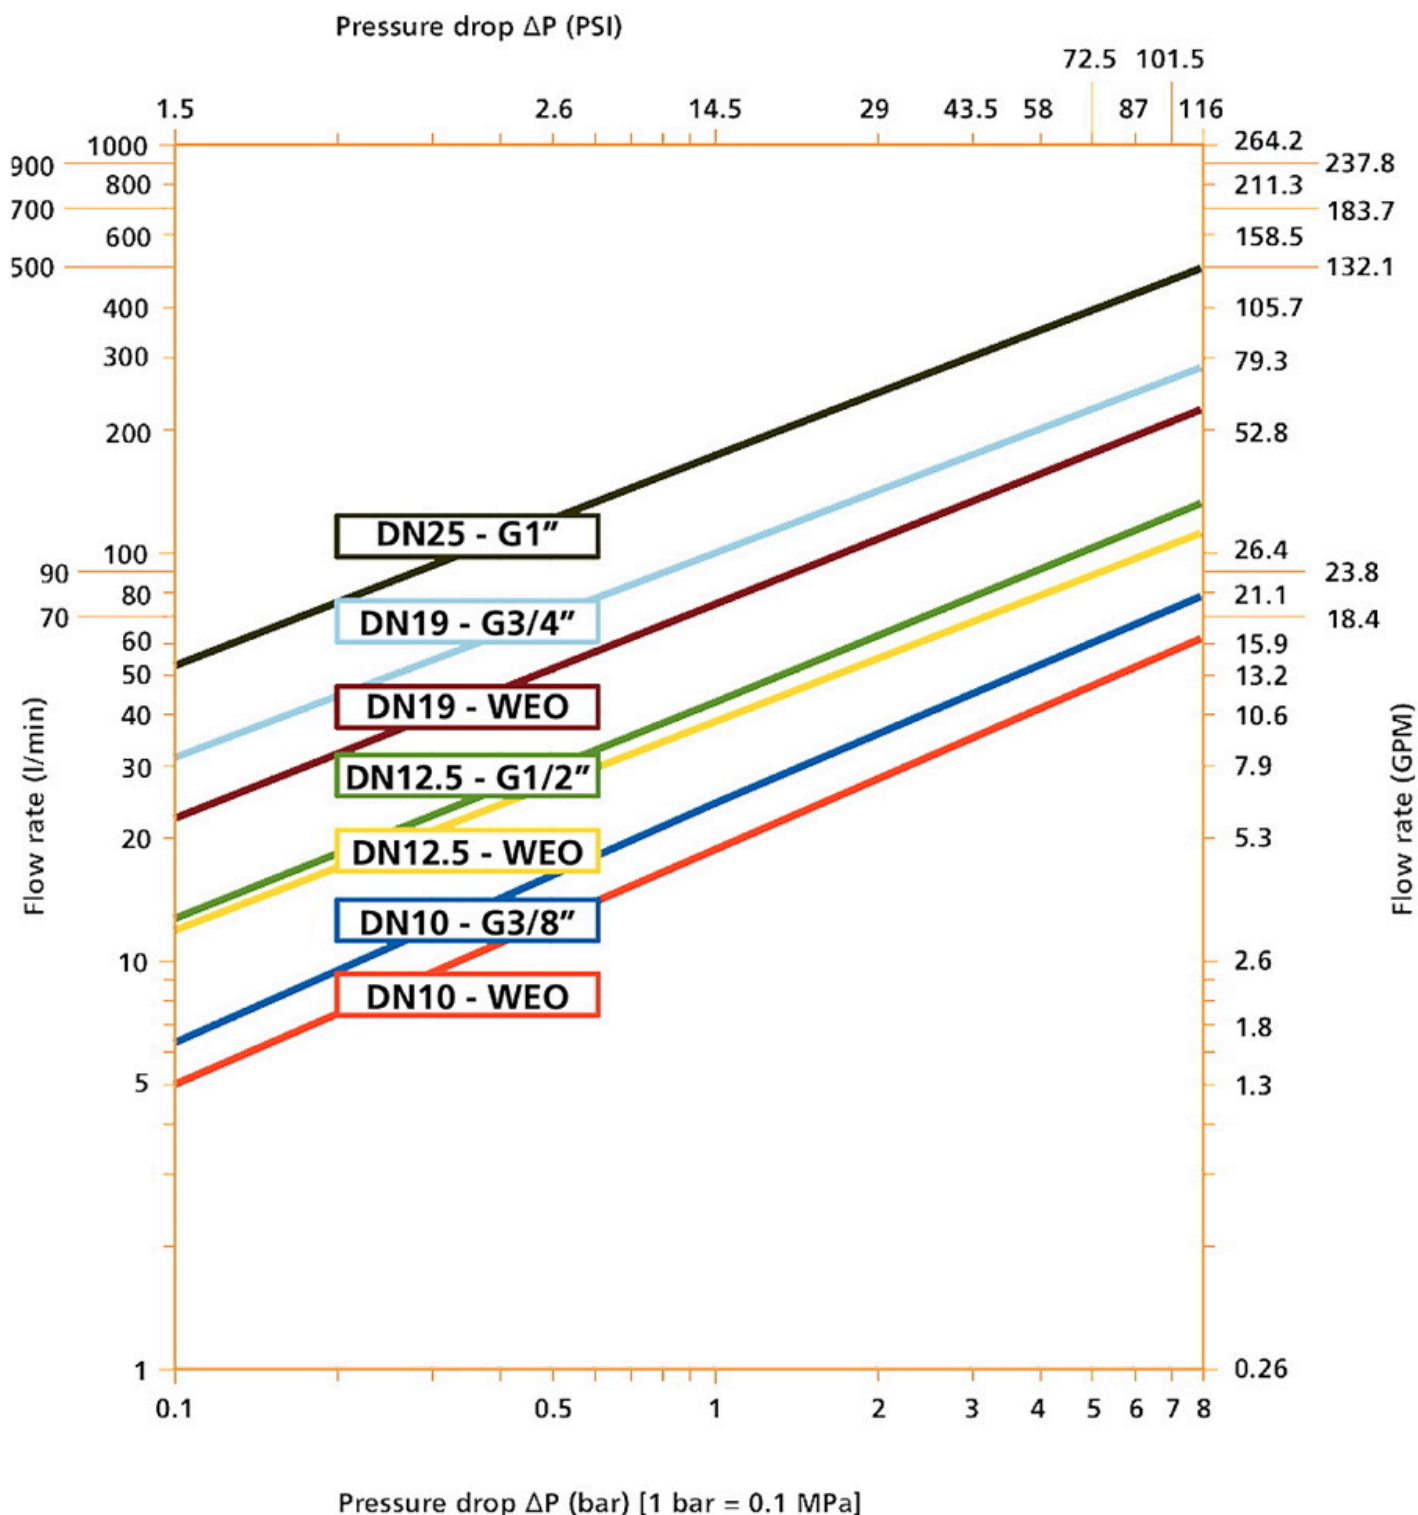

## Oil Flow

Check with an authorized CEJN distributor for availability and prices. All measurements are in mm. Other connections and sealing material on request. Some part numbers may be subject to minimum order quantities. CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO standards, unless stated otherwise.